

Separations | GC Column BPX1

More than five decades of innovative phase technologies and unique fused silica production capabilities, together provide end-to-end separation solutions for all applications.

Features and benefits

- Non-polar column.
- Dimensionally stabilized phase.
- Low bleed.
- Specifically designed for high temperature hydrocarbon analysis.

Recommended applications

- ASTM methods D2887 and D6532.

Product specifications


100% Dimethyl Polysiloxane.

Suitable replacement for: DB-2887, DB-HT Sim Dis, HP-1, Petrocol 2887, Petrocol EX2887, Rtx-2887.

Film thickness	Operating temperature
Polyimide clad 0.1-0.9 µm	30°C to 400°C
2.65 µm	30°C to 370°C



Fuels

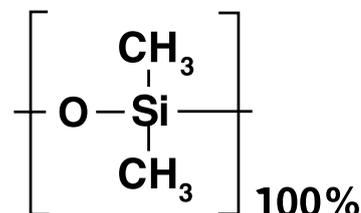

For more information about this product visit www.trajanscimed.com or contact techsupport@trajanscimed.com